

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



## LAVA ROCK GRILLS - TOP VERSION - L800

CODE CR0856059	MODEL 6NGL/G800	SERIE SERIE 600
-------------------	--------------------	--------------------

### GENERAL FEATURES

A line of compact cooking appliances, designed for people who do not want to give up on high performance, even in small spaces. Made of AISI 304 18/10 stainless steel, elegantly finished with Scotch Brite satin finish, it has rounded edges and capacious recessed areas; it is 600/650 mm deep and has a modular width of 400/600/700/800/1000 mm; the series comes complete with open base supports, with cupboards or refrigerated bases. The appliances can be easily put together to build a unit, that is compact, without any gaps thanks to a covering profile that guarantees protection against leaks and therefore excellent hygiene. High flues, ergonomic knobs mounted on a sloped control panel for better visibility, make this range easy to use from the very first time. All models are CE-approved.



### TECHNICAL DETAILS

#### LAVA ROCK GRILLS - TOP VERSION - L800

The round cooking pan stand is suitable for cooking fish. On request the pan stand to cook meat can be supplied. The work surface, equipped with splash guard edges is slightly sloped so as to send sauces, grease and dressings into the capacious drip tray designed for this purpose. Pilot flame, thermocouple, piezoelectric ignition and valved tap, guarantee maximum safety. The steel burner can be easily removed for cleaning.

## LAVA ROCK GRILLS - TOP VERSION - L800

CODE CR0856059	MODEL 6NGL/G800	SERIE SERIE 600
-------------------	--------------------	--------------------

### TECHNICAL INFORMATION

SPECIFICATIONS	DATA
CODE	CR0856059
DEFINITION	GRIGLIALAVICA G.60 M80 6NGL/G800
COMMERCIAL LINE	SERIE 600
SUPPLY	GAS
WIDTH	800 MM
DEPTH	650 MM
HEIGHT	295 MM
NET WEIGHT	70,000
VOLUME	0,153 M3
PACKAGING LENGTH	840,000
PACKAGING WIDTH	740,000
PACKAGING HEIGHT	700,000
PACKAGING VOLUME	0,435
PACKAGING GROSS WEIGHT	79,000
GAS POWER (G30/30 MBAR)	14,00 KW
GAS POWER (G25/25 MBAR)	14,00 KW
CERTIFIED MODEL	6NGL/G800
CERTIFICATION NUMBER	CE-0085DL0446
CERTIFICATION BODY	0085

**LAVA ROCK GRILLS - TOP VERSION - L800**

CODE CR0856059	MODEL 6NGL/G800	SERIE SERIE 600
-------------------	--------------------	--------------------

## ACCESSORIESES

CODE	MODEL	DESCRIPTION
CR0858029	6P4D/S	PORTINA PER BASE 400
CR0858059	6P6D/S	PORTINA PER BASE 600
CR0858039	6P7D/S	SET 2 DOORS PER BASE 700
MA10405042000	6PIC4	SHELF FOR SUPPORTS
MA10405043000	6PIC6	SHELF FOR SUPPORTS
CR0858079	6PIC7	RIPIANO PER CAVALLETTO
MA10405099000	6PIC8	SHELF FOR SUPPORTS
CR0858149	C70X-GRFVS	CHROME GRID FOR OVEN 650 SERIES
CR0858159	C70X-TFVS	STAINLESS STEEL TRAY FOR OVEN
CR0858009	6CS 4	KIT DRAWERS PER BASE 400
CR0858049	6CS 60	KIT DRAWERS PER BASE 600
MA10405014900	6CGN	COPRIGIUNTO
MA10405016900	6FC4	BACK CHIMNEY
MA10405017900	6FC6	BACK CHIMNEY
CR0858019	6FC7	BACK CHIMNEY
6FC8	6FC8	CHIMNEY
CR0858069	6FC10	BACK CHIMNEY
6TVA4	6TVA4	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE
6TVA6	6TVA6	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE
6TVA8	6TVA8	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE
8012900010	BOT/2C	BOTTLE
CR0952459	6TBR12.1	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE

## LAVA ROCK GRILLS - TOP VERSION - L800

CODE  
CR0856059

MODEL  
6NGL/G800

SERIE  
SERIE 600



The pan stands can be tilted to allow for easier and more effective cooking.

# LAVA ROCK GRILLS - TOP VERSION - L800

CODE  
CR0856059


MODEL  
6NGL/G800

SERIE  
SERIE 600

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -  
ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

GPL64G	OGPL64G	GPL68G	OGPL68G
6NGL/G400	EGL62T	6NGL/G800	EGL64T

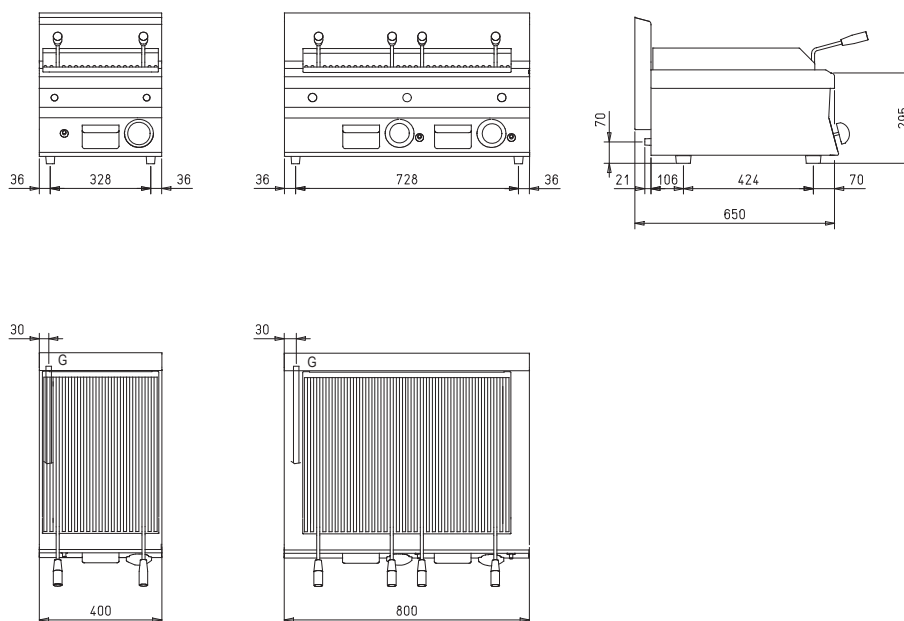

Legenda - Legende - Key - Legende - Leyenda - Legenda - Legenda

G Attacco arrivo gas - Gasanschluss - Gas connection  
Arriveè gaz - Union da gas - Gasaansluiting -  
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)