2 CERAMIC GLASS PLATES ON OPEN CUPBOARD

code CR1015939 Q90PCV/VCE400

QUEEN 9

GENERAL FEATURES

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas ranges having burners with various configurations and power ratings: 3.5 kW 5.7 kW, 7 kW and 10 kW. Double-ring burners for 7 and 10 kW models
- Wide range of accessories

The knobs offer optimum grip and help the chef to have the setting controls right under his eyes. Special attention has also been paid to the knob bezel that has been expertly designed to avoid penetration of liquids and/or dirt. Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



TECHNICAL DETAILS

- 2 CERAMIC GLASS PLATES ON OPEN CUPBOARD
- Watertight shatterproof glass-ceramic top;
- Cooking zones are marked with a 27x27 cm square serigraph print
- 4 kW single zone power;
- Temperature adjustment from 70-450°C via a thermostat;
- Heat mode activation light and residual heat indicator light.

| Project: | |
|-----------|--|
| Rev.: | |
| Zone: | |
| Location: | |
| | |



Via del Boscon, 424 32100 Belluno - Italy Tel. +39 0437 855411 Fax +39 0437 855444



2 CERAMIC GLASS PLATES ON OPEN CUPBOARD



Q90PCV/VCE400

QUEEN 9

TECHNICAL INFORMATION

| SPECIFICATIONS | DATA |
|-------------------------------|--|
| CODE | CR1015939 |
| DEFINITION | Q90NPCV/VCE400 VETROCERAMICA ELE.M40 A/G |
| MODEL | Q90PCV/VCE400 |
| COMMERCIAL LINE | QUEEN |
| SUPPLY | ELETTRICA |
| WIDTH | 400 MM |
| DEPTH | 900 MM |
| HEIGHT | 870 MM |
| NET WEIGHT | 59,400 |
| VOLUME | 0,313 M3 |
| PACKAGING LENGTH | 450,000 |
| PACKAGING WIDTH | 1020,000 |
| PACKAGING HEIGHT | 1150,000 |
| PACKAGING VOLUME | 0,540 |
| PACKAGING GROSS WEIGHT | 70,000 |
| POWER SUPPLY VOLTAGE STANDARD | 380-415V 3N |
| FREQUENCY | 50-60 Hz |
| ELECTRIC POWER | 8,000 KW |
| IPX PROTECTION | IPX5 |
| CERTIFIED MODEL | Q90NPCV/VCE400 |
| CERTIFICATION NUMBER | - |



Via del Boscon, 424 32100 Belluno - Italy

Tel. +39 0437 855411 Fax +39 0437 855444



2 CERAMIC GLASS PLATES ON OPEN CUPBOARD



code CR1015939 Q90PCV/VCE400

SERIE QUEEN 9

ACCESSORIESES

| CODE | MODEL | DESCRIPTION |
|----------------|-----------|---|
| CR1018839 | QP12 | Base door L 400 |
| CR1018849 | QKC11 | KIT DRAWERS GN1/1 H150 |
| CR1015349 | QRG11 | SET OF TRY SLIDES GN 1/1 |
| CR0592770 | ZA40 | FRONT PLINTH |
| CR0982789 | ZL90 | SIDE PLINTH SERIE 900 |
| MA97432000 | NXR | SET OF WHEELS NXR |
| MA97433000 | NXRI | SET OF WHEELS INOX NXRI |
| CR1015369 | QCH20 | DIRECTABLE WATER FLUE |
| CR0592869 | CR0592869 | 4 PIEDI X INSTALL.SU ZOCCOLO DI CEMENTO |
| CR1015339 | QPT | N. 4 PIEDINI IN ACCIAIO INOX PER INSTALLAZIONE SU PIANI |
| CR0592879 | CR0592879 | KIT ANTI RIBALTAMENTO 2 PIEDI X N900 |
| CR0592399 | NXTVT1 | KIT PANNELLI X BASE TECN.1 FRONTE NXTVT1 |
| CR0592409 | NXTVT2 | KIT PANNELLI X BASE TECN.2 FRONTI NXTVT2 |
| CR1018879 | Q90FTDX | FIANCO TERMINALE DESTRO QUEEN |
| CR1018889 | Q90FTSX | FIANCO TERMINALE SINISTRO QUEEN |
| CR0980009 | CANT | TUBULAR HANDRAIL FRONTALE (AL METRO LINEARE) |
| CR0980019 | 9CLAT | TUBULAR HANDRAIL LATERALE SERIE 900 |
| BN418031900211 | 9PRD | PIANO LATERALE RIBALTABILE DESTRO |
| BN418031900460 | 9PFD | PIANO LATERALE FISSO DESTRO |
| BN418031900221 | 9PRS | PIANO LATERALE RIBALTABILE SINISTRO |
| BN418031900470 | 9PFS | PIANO LATERALE FISSO SINISTRO |
| BN418031900121 | 9KR | KIT STATIC WARMER |

Via del Boscon, 424 32100 Belluno - Italy

Tel. +39 0437 855411 Fax +39 0437 855444



2 CERAMIC GLASS PLATES ON OPEN CUPBOARD



code CR1015939 MODEL Q90PCV/VCE400 QUEEN 9



PRODUCT'S

RANGE PLUS



Easy handling of pots and pans thanks to worktop flush, shatterproof glass.



A temperature control knob allows to select a heating zone of two different sizes in order to suit the pan bottom.



Thermostaticallycontrolled temperature range from 70 to 450°C.



Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



The front bar is a comfortable place for the chef to lean on; it means you will remain at a safe distance from the worktop and therefore protects from accidentally knocking against both items lying on the worktop and the knobs.

BARON Ali Group srl

Via del Boscon, 424 32100 Belluno - Italy Tel. +39 0437 855411 Fax +39 0437 855444






MODEL

CODE



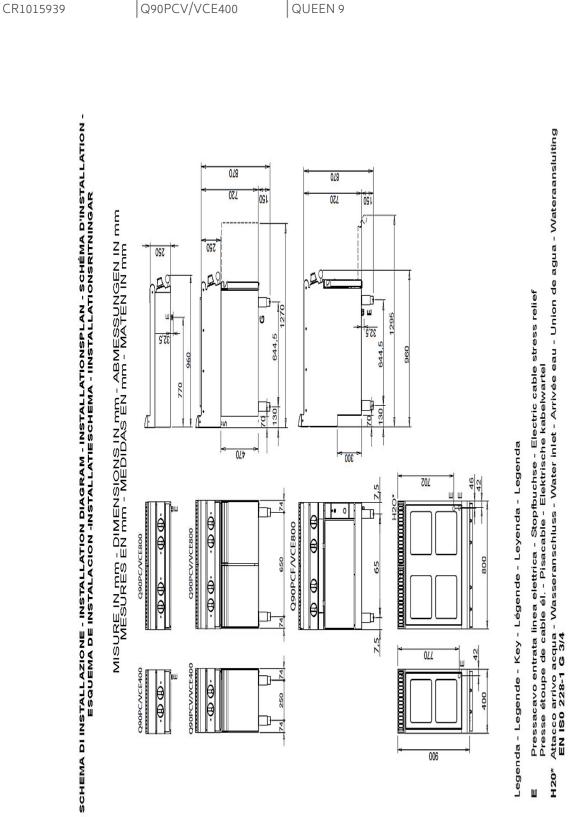

SERIE

Via del Boscon, 424 32100 Belluno - Italy

Tel. +39 0437 855411 Fax +39 0437 855444

