Project:
Rev.:
Zone:
Location:



CR1017879

MODEL Q90BM/G810

QUEEN 9

GENERAL FEATURES

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas ranges having burners with various configurations and power ratings: 3.5 kW 5.7 kW, 7 kW and 10 kW. Double-ring burners for 7 and 10 kW models
- Wide range of accessories

The knobs offer optimum grip and help the chef to have the setting controls right under his eyes. Special attention has also been paid to the knob bezel that has been expertly designed to avoid penetration of liquids and/or dirt. Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



TECHNICAL DETAILS

GAS

GAS BAIN MARIE 2 X GN1/1 - TOP VERSION

- Suitable for preserving dishes below 100°C and for extremely delicate cooking
- 40 module: tub dimensions 1xGN1/3 + 1xGN 1/1
- 80 module: tub dimensions 2xGN1/3 + 2xGN 1/1
- Stable flame burners adjusted via thermostatic valves
- Piezo-electric ignition





CR1017879

Q90BM/G810

QUEEN 9

TECHNICAL INFORMATION

SPECIFICATIONS	DATA
CODE	CR1017879
DEFINITION	Q90BM/G800 BAGNOMARIA GAS M80 TOP
COMMERCIAL LINE	QUEEN
SUPPLY	GAS
WIDTH	800 MM
DEPTH	900 MM
HEIGHT	250 MM
NET WEIGHT	85,000
VOLUME	0,180 M3
PACKAGING LENGTH	440,000
PACKAGING WIDTH	980,000
PACKAGING HEIGHT	500,000
PACKAGING VOLUME	0,400
PACKAGING GROSS WEIGHT	94,000
GAS POWER (G30/30 MBAR)	6,00 KW
GAS POWER (G25/25 MBAR)	5,50 KW
CERTIFIED MODEL	Q90BM/G800
CERTIFICATION NUMBER	CE-0085BS0153
CERTIFICATION BODY	0085





CODE CR1017879

Q90BM/G810

QUEEN 9

ACCESSORIESES

CODE	MODEL	DESCRIPTION			
CR1018839	QP12	Base door L 400			
CR1018859	QKC21	KIT DRAWERS GN2/1 H150			
CR1015359	QRG21	SET OF TRY SLIDES GN 2/1			
CR0592790	ZA80	FRONT PLINTH			
CR0982789	ZL90	SIDE PLINTH SERIE 900			
MA97432000	NXR	SET OF WHEELS NXR			
MA97433000	NXRI	SET OF WHEELS INOX NXRI			
CR1015369	QCH20	DIRECTABLE WATER FLUE			
CR0592869	CR0592869	4 PIEDI X INSTALL.SU ZOCCOLO DI CEMENTO			
CR1015339	QPT	N. 4 PIEDINI IN ACCIAIO INOX PER INSTALLAZIONE SU PIANI			
CR0592879	CR0592879	KIT ANTI RIBALTAMENTO 2 PIEDI X N900			
CR0592399	NXTVT1	KIT PANNELLI X BASE TECN.1 FRONTE NXTVT1			
CR0592409 NXTVT2 k		KIT PANNELLI X BASE TECN.2 FRONTI NXTVT2			
CR1018879	Q90FTDX	FIANCO TERMINALE DESTRO QUEEN			
CR1018889	Q90FTSX	FIANCO TERMINALE SINISTRO QUEEN			
CR0980009	CANT	TUBULAR HANDRAIL FRONTALE (AL METRO LINEARE)			
CR0980019	9CLAT	TUBULAR HANDRAIL LATERALE SERIE 900			
BN418031900211	9PRD	PIANO LATERALE RIBALTABILE DESTRO			
BN418031900460	9PFD	PIANO LATERALE FISSO DESTRO			
BN418031900221	9PRS	PIANO LATERALE RIBALTABILE SINISTRO			
BN418031900470	9PFS	PIANO LATERALE FISSO SINISTRO			
BN8031920110					





CODE

CR1017879

Q90BM/G810

QUEEN 9





Integrated water tap in the tank



Different combinations of GN basins Examples: M40: 1xGN1/3 + 1xGN 1/1 M80: 2xGN1/3 + 2xGN 1/1



Pan temperature control with overflow and perforated false bottom to support pans. GN pan size.



Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



The front bar is a comfortable place for the chef to lean on; it means you will remain at a safe distance from the worktop and therefore protects from accidentally knocking against both items lying on the worktop and the knobs.








CR1017879

Q90BM/G810

QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

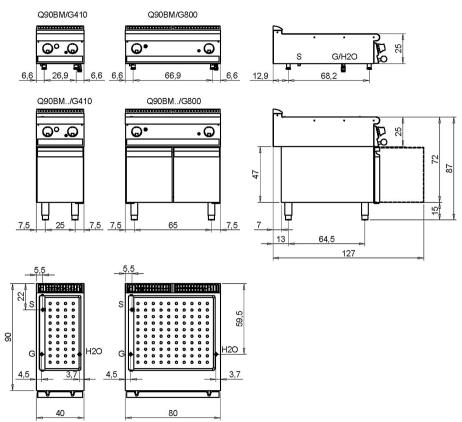

	Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda						
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)				
S S1	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN 10226-1 R 1/2 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	H20 A1 = A2 =	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água EN ISO 228-1 G1/2 Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio				
\$2 \$3	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket						
	water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível				
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno						

5

