



FEATURES

- Oil lubricated rotary vane vacuum pump, nominal speed 4 m³/h;
- Vacuum level control through high precision absolute-type vacuum sensor, which does not require calibration;
- Maximum vacuum 99,8% (2 millibar);
- 260 mm sealing bar, easily removable for cleaning;
- Brilliant stainless steel vacuum chamber with constant thickness, easy to clean being free of edges and receptacles;
- 10 editable user programs;
- 1 cycle for vacuum containers;
- "H2Out" pump oil dehumidification cycle,
- Resettable oil change alarm;
- Menu accessible to technical assistance for parameter adjustment and reading of cycles carried out;
- Waterproof control panel, resistant to liquids, humidity, dirt and dust;
- Electronic control and power cards protected from moisture and dirt by fireproof plastic covers;
- High-thickness PMMA (Plexiglass) lid with polished and rounded edges; opens automatically at the end of the cycle;
- Lowering system of the lid at the end of the work in the rest position by releasing the rear gas spring, which allows to release the tension on the gas spring and on the lid;
- Access for easy maintenance through front opening of the casing;
- Standard "Easy" accessory for external vacuum in embossed bags;
- 2 PE-filling plates for product adjustment and cycle speed up.

DESCRIPTION

The basic model of the Lerica C-Series line stands out for its extreme compactness, ease of use and versatility, which makes it an ideal work tool for activities that operate in small spaces. Made entirely of AISI304 stainless steel, it stands out for the digital control panel with absolute vacuum sensor. Maintenance and cleaning are facilitated by the front opening of the machine body and the bright surfaces of the vacuum chamber.



SEALING BAR 260mm
VACUUM PUMP 4 m³/h
SENSOR CONTROL

ACCESSORIES (NOT INCLUDED)

- Bags for storage, cooking and "cook & chill"; embossed bags;
- Stainless steel cart with castors and shelf;
- Inclined stainless steel plate for liquid packing;
- Stainless steel vacuum containers; suction device.


CE

According to: Standard EN/IEC 60335-1
Safety assured by
accredited third-party certification body!

| | | |
|---------|------|----------|
| PROJECT | DATE | APPROVED |
| ITEM | QTY | |

VACUUM PACKAGING MACHINES C254

UPDATED:
27/07/2021

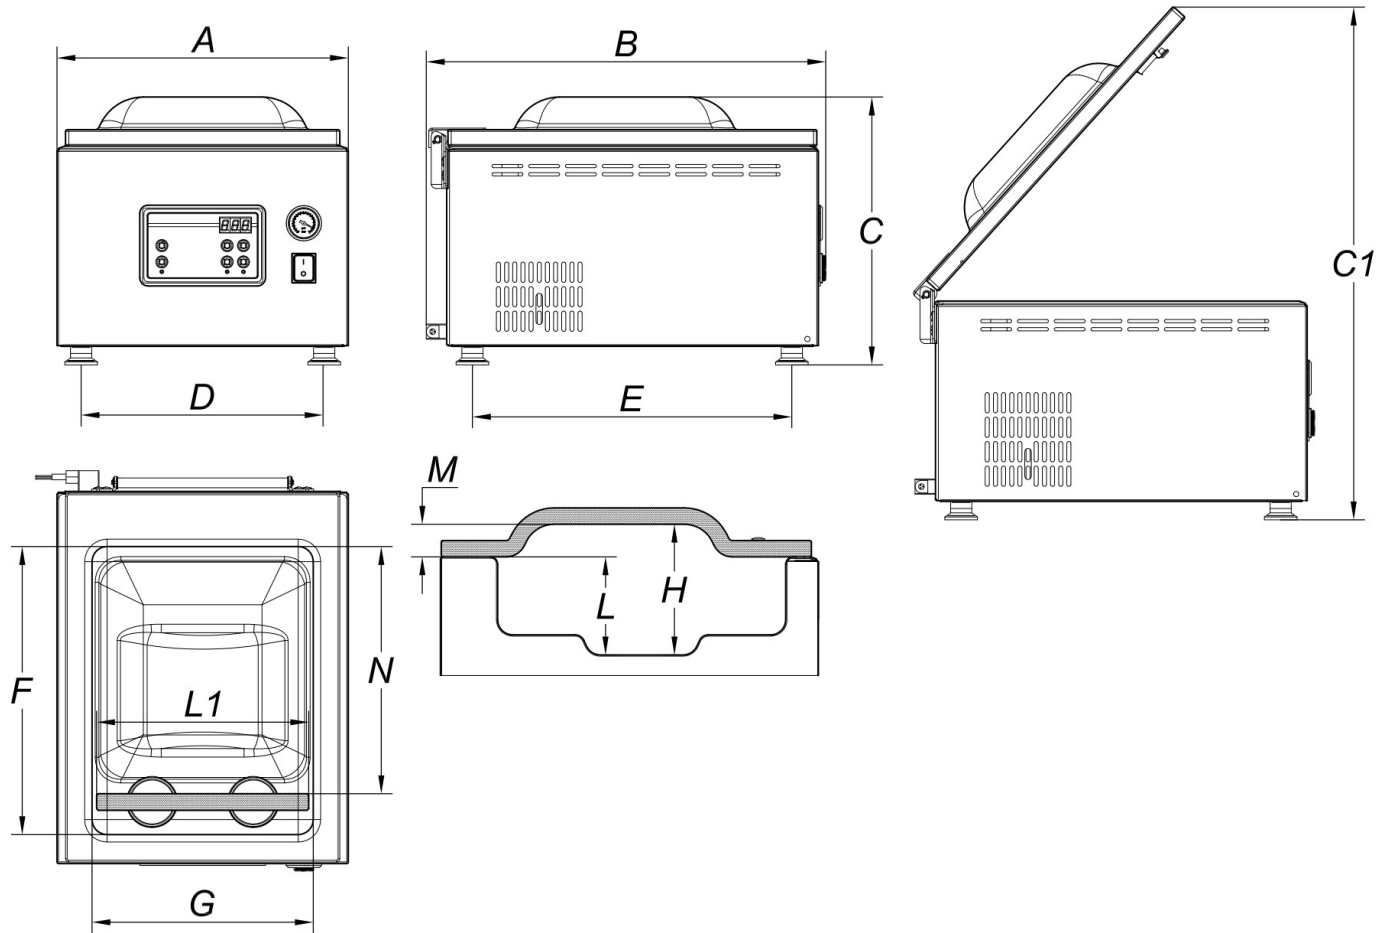

SPECIFICATIONS

| | | |
|-----------------------------------------------|-------------------|-------------------------------|
| Length of seal L1 | mm | 260 |
| Nominal pump speed | m ³ /h | 4 |
| Final pressure | mbar | 2 |
| Chamber Size (FxGxH) | mm | 353x271x160 |
| Useful space Chamber (N) | mm | 303 |
| Chamber depth (L) | mm | 120 |
| Chamber volume | Lt | 13 |
| Power | W | 290 |
| Electrical voltage/Frequency/Phases | V/Hz | 220-240V / 50-60Hz / 1Ph+N+PE |
| Power cord and plug | | 3m + IEC / Schuko |
| Current | A | 1,26 |
| Housing materials | | Stainless steel (AISI304) |
| Vacuum chamber material | | Stainless steel (AISI304) |
| Lid material | | PMMA (plexiglas) |
| Overall dimensions (AxBxC) | mm | 357x489x328 |
| Maximum height with open lid (C1) | mm | 628 |
| Distance between supports (DxE) | mm | 296x391 |
| Weight (with shelves) | kg | 28 |
| Noise level | dB(A) | 48 |
| Environmental operating temperature (min-max) | °C | 12-40 |