



FEATURES


- Machine body and base in AISI304 stainless steel; upper and lower vacuum chamber in ABS Bayblend technopolymer;
- Self-lubricating piston pump of 11 l/min (0,66 mc/h), maintenance-free;
- 310mm sealing bar;
- Automatic cycle start by lowering the upper lid; automatic opening at the end of the cycle by solenoid valve;
- Vacuum sensor for automatic run of the packaging cycle (sealing starts automatically when maximum vacuum is reached);
- Manual operating mode (manual sealing activation);
- Four adjustable sealing intensity levels;
- Suction tube and "Pump"- operating mode for vacuum packing inside rigid vacuum containers included.

DESCRIPTION

LEVAC3 is a vacuum sealer with external suction characterized by compact dimensions, completely made of AISI304 stainless steel, fitted with a 310mm sealing bar and 11 l/min (0,66 mc/h) self-lubricating piston pump. Suitable for packing of solid and dry products with use of channelled vacuum bags and liquid or crushing-sensitive products inside vacuum containers. For domestic and small business use.

EXTERNAL SUCTION MACHINES LEVAC 3

UPDATED: 28/10/2022



SEALING BAR 310mm
VACUUM PUMP 11 L/min
SENSOR CONTROL

ACCESSORIES (NOT INCLUDED)


- Channelled vacuum bags;
- Channelled vacuum rolls 20/30cm x 6 mt;
- Vacuum containers "Conserbox".

CE

According to: Standard EN/IEC 60335-1

Safety assured by
accredited third-party certification body!

PROJECT	DATE	APPROVED
ITEM	QTY	

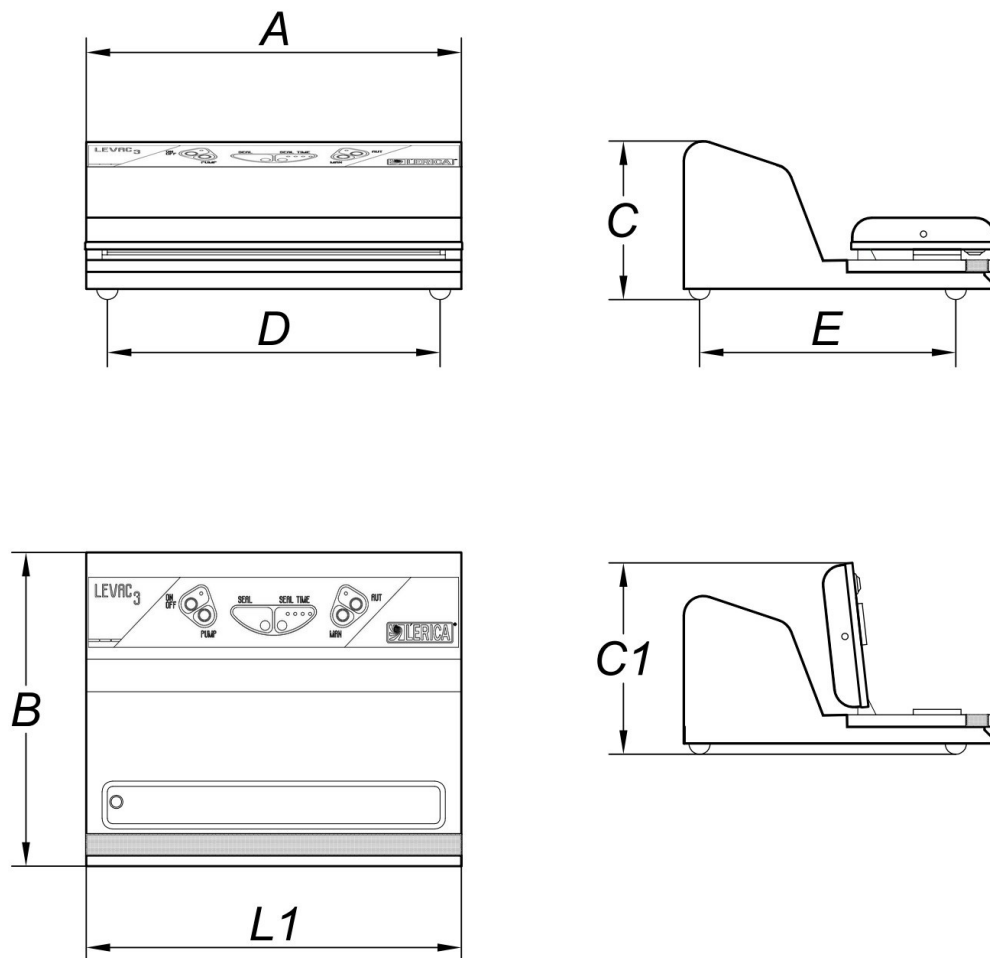

SPECIFICATIONS

Length of seal L1	mm	310
Nominal pump speed	L/min	11
Power	W	850
Electrical voltage/Frequency/Phases	V/Hz	220-240V / 50-60Hz / 1Ph+N+PE
Current	A	3,7
Power cord and plug		2 mt / Schuko
Housing materials		Stainless steel (AISI304)
Vacuum chamber materials		Polyethylene
Overall dimensions (AxBxC)	mm	353x295x150
Overall dimensions with operating machine (AxBxC1)	mm	353x295x180
Distance between supports (DxE)	mm	313x241
Net weight	kg	8
Maximum vacuum bags width	mm	300